

Data sheet article CSF-60

Technical data and application safety

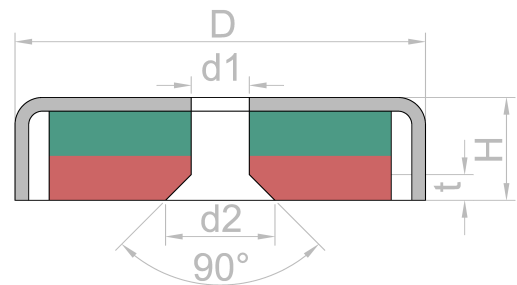
Webcraft GmbH
 Industriepark 206
 78244 Gottmadingen, Germany

Phone: +49 7731 939 839 2
 Fax: +49 7731 939 839 9

www.supermagnete.fr
 support@supermagnete.fr



1. Technical information

Article ID	CSF-60
EAN	7640155431569
Material	Ferrite
Strength	approx. 36 kg (approx. 353 N)
Pot diameter D	60 mm
Pot height H	15 mm
Borehole d1	8,5 mm
Borehole d2	18,12 mm
Countersink t	4,81 mm
Magnetisation	Y30BH
Coating	Nickel (Ni)
Max. working temperature	50°C
Tolerance	+/- 0.1 mm
Steel	Q235 (China)
Weight	205,0000 g




Pollutant-free according to RoHS Directive 2011/65/EU.


2. Safety tips


<p>Warning</p> 	<p>Contusions</p> <p>Big magnets have a very strong attractive force. Unsafe handling could cause jamming of fingers or skin in between magnets. This may lead to contusions and bruises.</p> <p>Wear heavy protective gloves when handling larger magnets.</p>
<p>Warning</p> 	<p>Pacemaker</p> <p>Magnets could affect the functioning of pacemakers and implanted heart defibrillators.</p> <ul style="list-style-type: none"> • A pacemaker could switch into test mode and cause illness. • A heart defibrillator may stop working. <ul style="list-style-type: none"> • If you wear these devices keep sufficient distance to magnets: www.supermagnete.fr/eng/faq/distance • Warn others who wear these devices from getting too close to magnets.


Warning	Heavy objects
	<p>Too heavy loads, symptoms of fatigue as well as material defect could cause a magnet or magnetic hook to loosen from the surface that it was attached to. Falling objects could lead to serious injuries.</p> <ul style="list-style-type: none"> • The indicated adhesive force applies only to ideal conditions. Allow for a high safety cushion. • Don't use magnets in places where people could sustain injuries in case of material failure.


3. Handling and storing

Caution	Magnetic field
	<p>Magnets produce a far-reaching, strong magnetic field. They could damage TVs and laptops, computer hard drives, credit and ATM cards, data storage media, mechanical watches, hearing aids and speakers.</p> <ul style="list-style-type: none"> • Keep magnets away from devices and objects that could be damaged by strong magnetic fields. • Please refer to our table of recommended distances: www.supermagnete.fr/eng/faq/distance


Caution	Nickel allergy
	<p>Many of our magnets contain nickel, also those without nickel coating.</p> <ul style="list-style-type: none"> • Some people have an allergic reaction when they come into contact with nickel. • Nickel allergies could develop from perpetual contact with nickel-plated objects. • Avoid perpetual skin contact with magnets. • Avoid contact with magnets if you already have a nickel allergy.


Notice	Influence on people
	<p>According to the current level of knowledge, magnetic fields of permanent magnets do not have a measurable positive or negative influence on people. It is unlikely that permanent magnets constitute a health risk, but it cannot be ruled out entirely.</p> <ul style="list-style-type: none"> • For your own safety, avoid constant contact with magnets. • Store large magnets at least one metre away from your body.

Notice	Temperature resistance
	<p>Ferrite magnets can be used at temperatures between -40°C and 250°C. At lower and higher temperatures they lose part of their adhesive force permanently.</p> <p>Don't use ferrite magnets in places where they are exposed to temperatures below -40°C or above 250°C.</p>

Notice	Mechanical treatment
	<p>Ferrite magnets are brittle. When drilling or sawing a magnet with improper tools, the magnet may break.</p> <p>Stay away from mechanical treatment of magnets if you do not possess the necessary equipment and experience.</p>

4. Transportation tips

Caution	Airfreight
	<p>Magnetic fields of improperly packaged magnets could influence airplane navigation devices. In the worst case it could lead to an accident.</p> <ul style="list-style-type: none"> • Airfreight magnets only in packaging with sufficient magnetic shielding. • Please refer to the respective regulations: www.supermagnete.fr/eng/faq/airfreight

<p>Caution</p> 	<p>Postage</p> <p>Magnetic fields of improperly packaged magnets could cause disturbances in sorting machines and damage fragile goods in other packages.</p> <ul style="list-style-type: none">• Please refer to our shipping tips: www.supermagnete.fr/eng/faq/shipping• Use a large box and place the magnet in the middle surrounded by lots of padding material.• Arrange magnets in a package in a way that the magnetic fields neutralise each other.• If necessary, use sheet iron to shield the magnetic field.• There are stricter rules for airfreight: Refer to the warning notice "Airfreight".
---	---

For more information about magnets please review
www.supermagnete.fr/faq.php.

Last update: 26/10/2017